




**DDT**

**Plastic Centrifugal  
Booster Pumps**

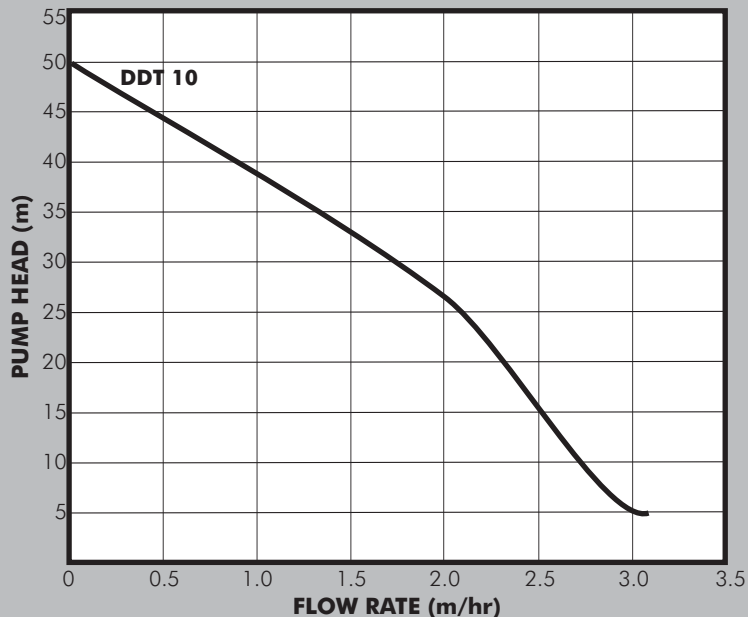

**PUMP**

The DAYLIFF DDT pump is of single stage centrifugal impeller self priming design suitable for small scale irrigation, water boosting and water transfer applications. Material of construction are stainless shaft, UV-proof composite material for the pump body and all hydraulic components in contact with water are made of engineering plastic.

**MOTOR**

Pumps are close coupled to reliable TEFC electric motors designed for continuous operation and are provided with a thermal cut out to protect against electrical overload. They can be connected directly to the mains power supply through a 10A fuse or MCB.

**Enclosure Class:** IPX4

**Insulation Class:** F

**Voltage:** 1x240V

**Speed:** 2850rpm

**OPERATING CONDITIONS**

**Pumped Liquid:** Thin, clean, chemically non-aggressive liquids without solids or fibres

**Max. Fluid Temperature:** +60°C

**Max Ambient Temperature:** +40°C

**Max. Suction Lift:** 9m at sea level

**PUMP DATA**

Model	Motor		Current (A)	DNA (")	DNM (")	Dimensions (mm)			Weight (kg)
	kW	HP				W	H	L	
<b>DDT 10</b>	0.75	1	5.2	1	1	194	198	388	10.4

